


CABLE TIES

765 EB

LVD 2014/35/EU

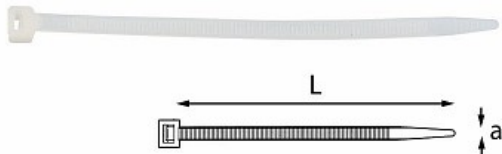

- Material: Polyamide 6.6
- Excellent resistance to aromatic solvents, oils, greases, petroleum products
- Good resistance to bases
- Limited resistance to acids
- Not resistant to phenols and chlorinated solvents
- Pack of 100 pieces

Self-extinguishing	UL 94 - V2
Operating temperature (°C)	-10°C ÷ 85°C
Installation temperature	-10°C ÷ 60°C
Humidity absorption	2,7% - 2,8% (23°C - 50% R.H.)

Family details


Code	axL mm	Ø max	Quantity for packaging
U07650011	2,5x98	21	1
U07650012	2,6x200	52	1
U07650013	3,6x140	35	1
U07650014	3,6x290	80	1
U07650015	4,8x200	50	1
U07650016	4,8x290	79	1

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)
Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia
Partita IVA e C.F.: 03225990138

StanleyBlack&Decker

Società a Socio Unico soggetta a coord. e controllo da parte di Stanley Black & Decker, Inc.
Capitale Sociale I.V. € 12.000.000

Code	axL mm	Ø max	 Quantity for packaging
U07650017	4,8x360	100	1
U07650019	2,6x135	32	1
U07650020	3,6x200	50	1
U07650021	7,8x365	100	1

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)
Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia
Partita IVA e C.F.: 03225990138

StanleyBlack&Decker

Società a Socio Unico soggetta a coord. e controllo
da parte di Stanley Black & Decker, Inc.
Capitale Sociale I.V. € 12.000.000