


## CABLE TIES

### 765 EN


LVD 2014/35/EU

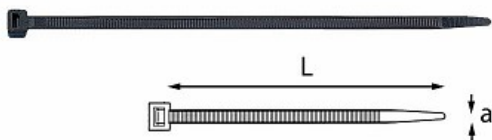

- Material: Polyamide 6.6
- Excellent resistance to aromatic solvents, oils, greases, petroleum products
- Good resistance to bases
- Limited resistance to acids
- Not resistant to phenols and chlorinated solvents
- Pack of 100 pieces

Self-extinguishing	UL 94 - V2
Operating temperature (°C)	-40°C ÷ 85°C
Installation temperature	-10°C ÷ 60°C
Humidity absorption	2,7% - 2,8% (23°C - 50% R.H)

## Family details


Code	axL mm	Ø max	 Quantity for packaging
U07650051	2,5x98	21	1
U07650052	3,6x140	35	1
U07650053	4,8x178	45	1
U07650054	4,8x200	50	1
U07650055	4,8x290	79	1
U07650056	4,8x360	100	1

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)  
Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia  
Partita IVA e C.F.: 03225990138

**StanleyBlack&Decker**

Società a Socio Unico soggetta a coord. e controllo da parte di Stanley Black & Decker, Inc.  
Capitale Sociale I.V. € 12.000.000

Code	axL mm	Ø max	 Quantity for packaging
U07650057	7,8x240	63	1
U07650058	7,8x365	100	1
U07650059	7,8x750	200	1
U07650060	2,6x135	32	1
U07650061	2,6x200	52	1
U07650062	3,6x200	50	1
U07650063	3,6x290	80	1
U07650064	7,8x540	158	1

## Sets / Compositons

### Articles



496 H2 - Assortment for electrotechnics (85 pcs.)

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)  
Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia  
Partita IVA e C.F.: 03225990138

**StanleyBlack&Decker**

Società a Socio Unico soggetta a coord. e controllo da parte di Stanley Black & Decker, Inc.  
Capitale Sociale I.V. € 12.000.000