


ALUMINIUM IMPACT WRENCH

910 EL1 1

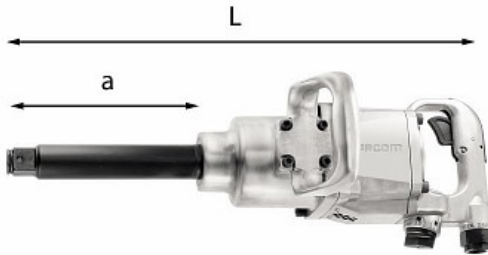

- Reversible model with double hammer mechanism
- Three power settings for tightening and untightening
- Spare rotor blades (6 pieces): code 31K100048

Square drive (")	1
Strokes per minute	720
Air inlet (")	1/2
Recommended air pressure (bar)	6,2
Torque in use (Nm min-Max)	850÷1300
Average air consumption (l/min)	243
Vibrations (m/s ²)	16,70
Sound power dB(A)	114 ±3
Max torque (Nm)	4068
Free speed (rpm)	4400
Sound level dB(A)	103 ±3
Ø hose size (mm)	13

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)
 Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia
 Partita IVA e C.F.: 03225990138



StanleyBlack&Decker

Società a Socio Unico soggetta a coord. e controllo da parte di Stanley Black & Decker, Inc.
 Capitale Sociale I.V. € 12.000.000

Bolt capacity

M33

Family details

Code	LxPxH mm	a mm	 Weight kg	 Quantity for packaging
U09100023	523x202x172	170	11,3	1

Stanley Black & Decker Italia S.r.l.

Sede legale: Via Energy Park 6 - 20871 Vimercate (MB)
Sede operativa: Via Volta 3 - 21020 Monvalle (VA) Italia
Partita IVA e C.F.: 03225990138

StanleyBlack&Decker

Società a Socio Unico soggetta a coord. e controllo
da parte di Stanley Black & Decker, Inc.
Capitale Sociale I.V. € 12.000.000