



# 235 1/2" NTX

## Chiavi a bussola TORX®



### DATI TECNICI

- Acciaio speciale altamente legato al Cromo Vanadio
- Esecuzione cromata

### NORMATIVE


- ISO 1174-1



# 235 1/2" NTX

## Chiavi a bussola TORX®

### DISEGNO

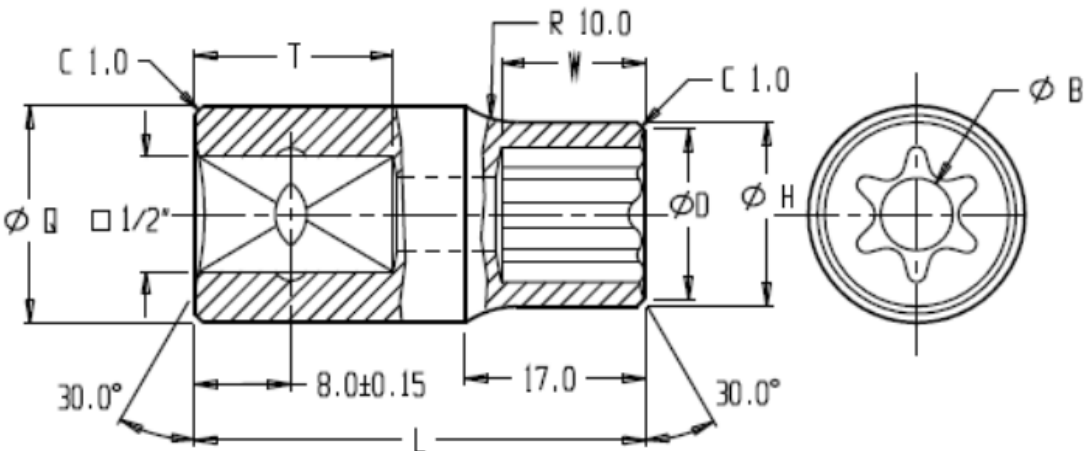

### TABELLA DISEGNO

| Codice    | Misura | L  | Q    | H    | T  | W  | B    | Durezza<br>HRC |
|-----------|--------|----|------|------|----|----|------|----------------|
| U02352405 | E10    | 38 | 21,8 | 13,3 | 16 | 10 | 5,6  | 39:48          |
| U02352406 | E12    | 38 | 21,8 | 15   | 16 | 12 | 7,2  |                |
| U02352407 | E14    | 38 | 21,8 | 17   | 16 | 12 | 8    |                |
| U02352409 | E16    | 38 | 21,8 | 18,5 | 16 | 12 | 8,8  |                |
| U02352410 | E18    | 38 | 21,8 | 20   | 16 | 12 | 10,4 |                |
| U02352411 | E20    | 38 | 23,3 | /    | 16 | 13 | 12   |                |
| U02352412 | E24    | 38 | 26,8 | /    | 16 | 16 | 12,5 |                |

Dimensioni in mm



# 235 1/2" NTX

## Chiavi a bussola TORX®

### MATERIALI

Acciaio: 50BV30

### CONFEZIONAMENTO

- Sacchetto di plastica
- Misure: 10-12-14-16-18-20-24



**Stanley Black & Decker Italia Srl**  
Via Volta, 3 - 21020 Monvalle (VA)  
Tel. +39 0332 790111 - Fax +39 0332 790330  
info.mv@usag.it

**USAG.IT**  
**USAG-TOOLS.NET**

UK Importer - USAG UK, 270 Bath Rd, Slough SL1 4DX, England