



256 AN

Chiavi speciali per raccordi



DATI TECNICI

- Teste diritte a profilo esagonale
- Sistema di appoggio sul dado durante la manovra

NORMATIVE

ISO 691



256 AN

Chiavi speciali per raccordi

DISEGNO

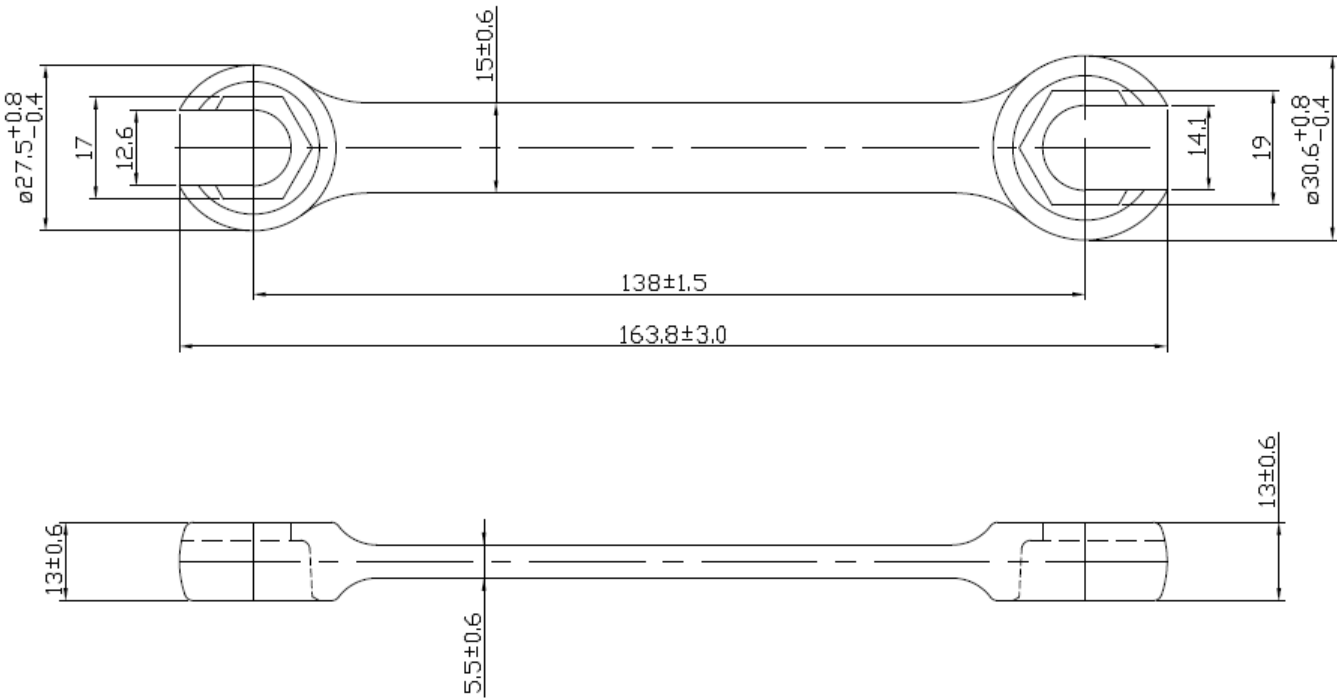


TABELLA DISEGNO

Codice	Misura	L	L1	S	S1	A1	A1	B	B1	T	T1	T2	T3	T4	C	Durezza HRC
U02560061	8x10	125.7	110	8	10	5.9	7.4	15.8	18.3	10	10	4	2.3	2.3	9	43÷49
U02560062	10x11	127.1	110	10	11	7.4	8.1	18.3	19.2	10	10	4	2.3	2.3	10.5	
U02560063	11x13	143.7	125	11	13	8.1	9.5	19.2	22.1	11.5	11.5	5	2.8	2.8	12	
U02560064	12x14	145.5	125	12	14	8.9	10.3	21.5	23.8	11.5	11.5	5	2.8	2.8	13	
U02560065	17x19	163.8	138	17	19	12.6	14.1	27.5	30.6	13	13	5.5	3	4	15	

Dimensioni in mm



256 AN

Chiavi speciali per raccordi

MATERIALI

Acciaio: 6140

Finitura: Cromata

CONFEZIONAMENTO

- Scatola di cartone 2 pz



Stanley Black & Decker Italia Srl
Via Volta, 3 - 21020 Monvalle (VA)
Tel. +39 0332 790111 - Fax +39 0332 790330
info.mv@usag.it

USAG.IT
USAG-TOOLS.NET

UK Importer - USAG UK, 270 Bath Rd, Slough SL1 4DX, England